
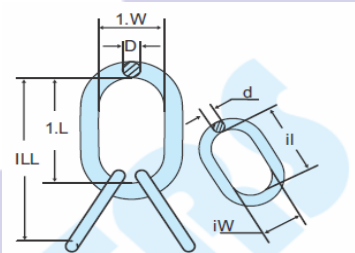


**MASTER RING****Forged Master Link**

Working Load Limit (Tons)	Dimension (mm)			Net Weight (Kgs)
	D	1L	1W	
2.20	13	127	63	0.36
3.00	16	152	76	0.7.0
4.70	19	140	70	0.93
6.40	22	160	90	1.50
11.00	25	178	89	2.10
16.00	32	220	110	4.24
21.70	38	267	133	7.17
28.40	45	305	152	11.55
44.30	51	355	178	17.20
65.00	57	406	203	24.50
66.80	63	406	203	30.90
98.00	70	406	241	39.50
103.00	76	457	229	50.34
119.00	83	508	254	65.68
126.00	89	610	305	90.24
152.00	95	508	254	89.27
169.00	102	508	254	103.43

**Master Link Assembly**

Working Load Limit (Tons)	Main Ring			Intermediate		
	D	1L	1W	D	ii	iW
2.00	14	100	60	12	85	40
2.50	18	160	90	14	100	60
4.00	20	160	90	14	100	60
6.40	22	180	100	18	150	70
9.60	28	270	140	22	160	90
13.9	22	270	140	25	180	100
21.00*	40	300	160	31	270	140
30.00*	45	340	180	36	285	155
40.00*	51	350	190	45	340	180